



DESCRIPTION



The ST4828N is the Dual N-Channel logic enhancement mode power field effect transistors are produced using high cell density , DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application , notebook computer Li-ion Battery , power management and other battery powered circuits where high-side switching .

PIN CONFIGURATION
SOP-8

FEATURE

- 60V/10A, $R_{DS(ON)} = 30m\Omega$ (Typ.) @VGS = 10V
- 60V/6A, $R_{DS(ON)} = 35m\Omega$ @VGS = 4.5V
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOP-8 package design

PART MARKING
SOP-8


N:Type
Y:Year Code
A:Process Code





STN4828 

Dual N Channel Enhancement Mode MOSFET
10A

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)


Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V _{DSS}	60	V
Gate-Source Voltage	V _{GSS}	±20	V
Continuous Drain Current (T _J =150°C)	I _D	T _A =25°C 8.0	A
		T _A =70°C 6.0	
Pulsed Drain Current	I _{DM}	30	A
Continuous Source Current (Diode Conduction)	I _S	11	A
Power Dissipation	P _D	T _A =25°C 2.5	W
		T _A =70°C 1.6	
Operation Junction Temperature	T _J	-55/150	°C
Storage Temperature Range	T _{STG}	-55/150	°C
Thermal Resistance-Junction to Ambient	R _{θJA}	80	°C/W








ELECTRICAL CHARACTERISTICS (Ta = 25°C Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	60			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\ \mu A$	1.0		3.0	V
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS} $T_J=55^\circ C$	$V_{DS}=60V, V_{GS}=0V$			1	uA
		$V_{DS}=60V, V_{GS}=0V$			5	
On-State Drain Current	$I_{D(on)}$	$V_{DS}\leq 5V, V_{GS}=10V$	25			A
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=10A$		0.030		Ω
		$V_{GS}=4.5V, I_D=6A$		0.035		
Forward Tran Conductance	g_{fs}	$V_{DS}=5.0V, I_D=5.3A$		24		S
Diode Forward Voltage	V_{SD}	$I_S=1.7A, V_{GS}=0V$		0.8	1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=30V, V_{GS}= 5V$ $I_D=5.3A$		10		nC
Gate-Source Charge	Q_{gs}			3.5		
Gate-Drain Charge	Q_{gd}			3.6		
Input Capacitance	C_{iss}	$V_{DS}=30V, V_{GS}=0V$ $f=1MHz$		890		pF
Output Capacitance	C_{oss}			84		
Reverse TransferCapacitance	C_{rss}			49		
Turn-On Time	$t_{d(on)}$ t_r	$V_{DD}=30V, R_L=6.8\ \Omega$ $I_D=4.4A, V_{GEN}=10V$ $R_G=1\ \Omega$		10	14	nS
				15	20	
Turn-Off Time	$t_{d(off)}$ t_f			25	35	
				10	15	




TYPICAL CHARACTERISTICS (25°C Unless Note)




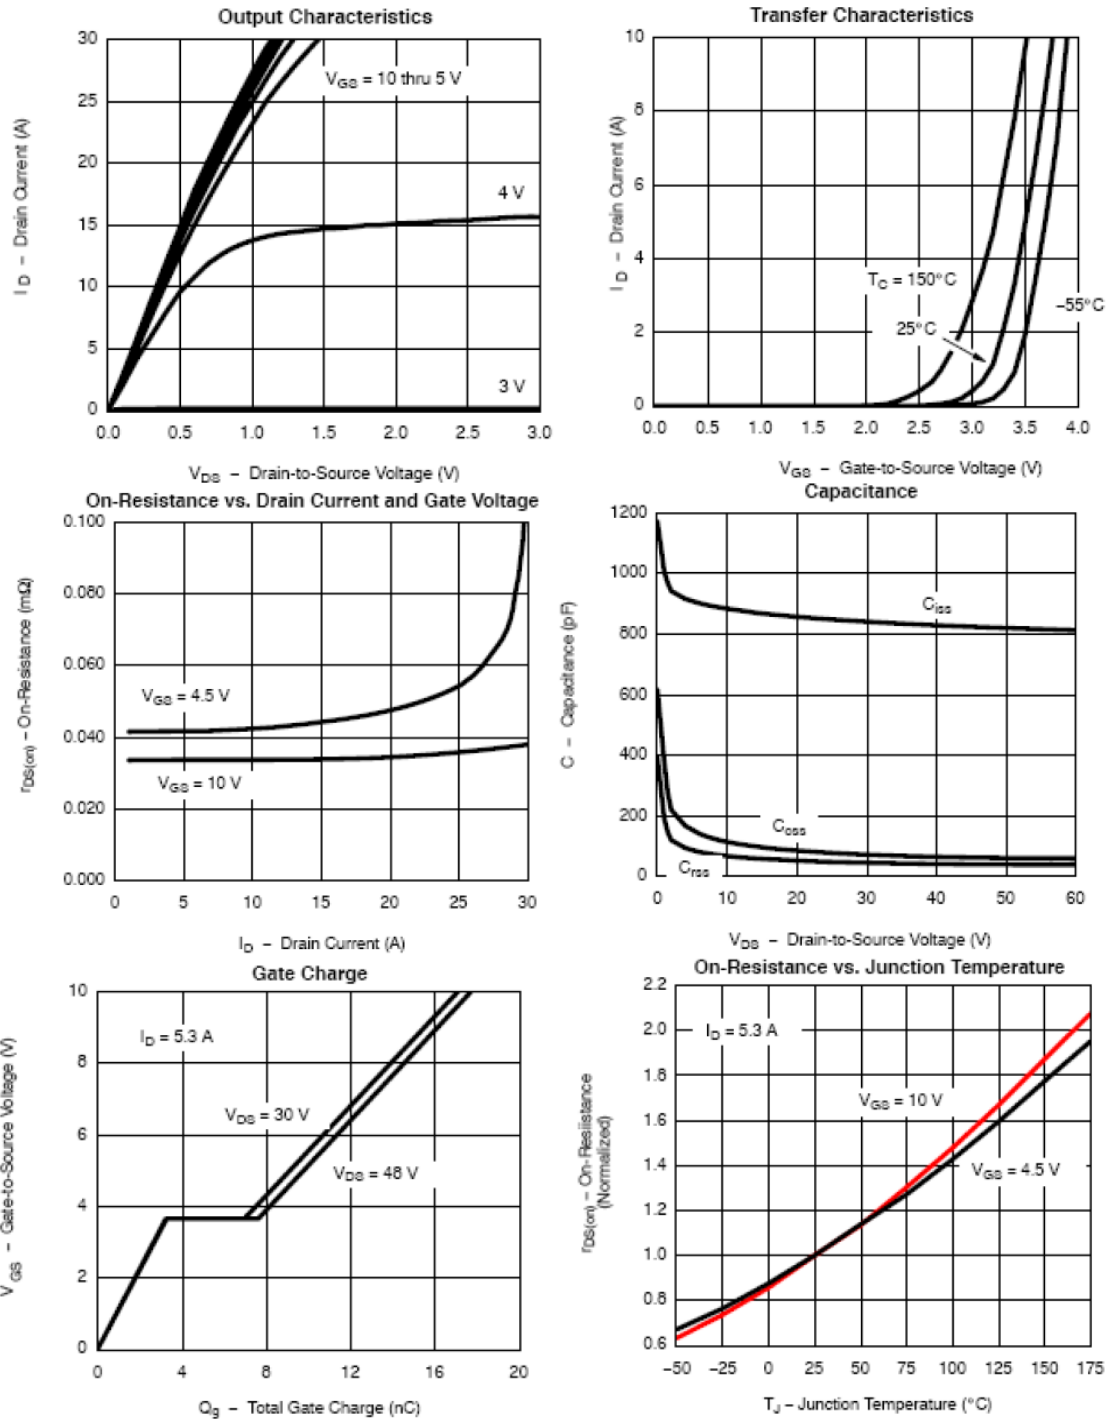


TYPICAL CHARACTERISTICS (25°C Unless Note)

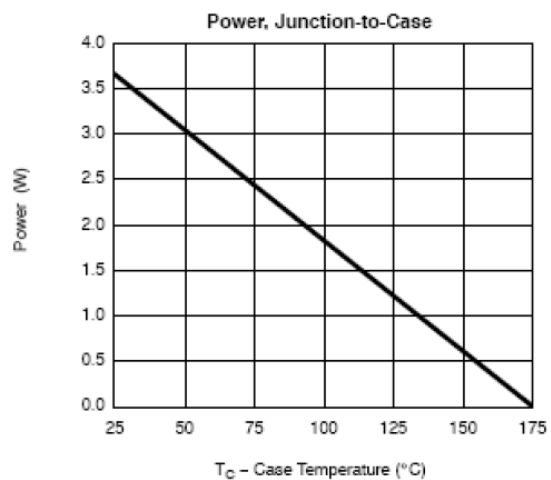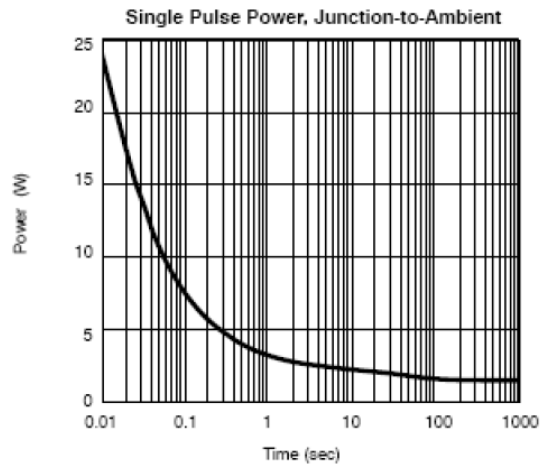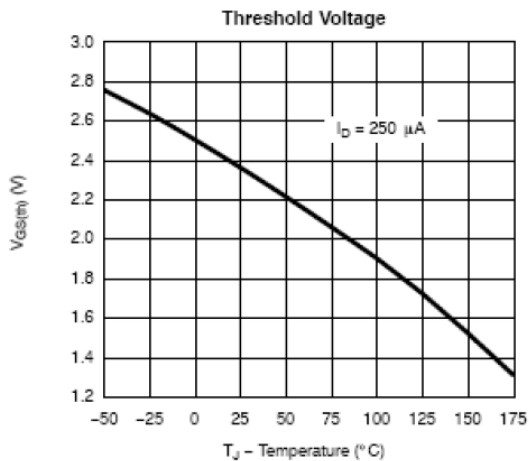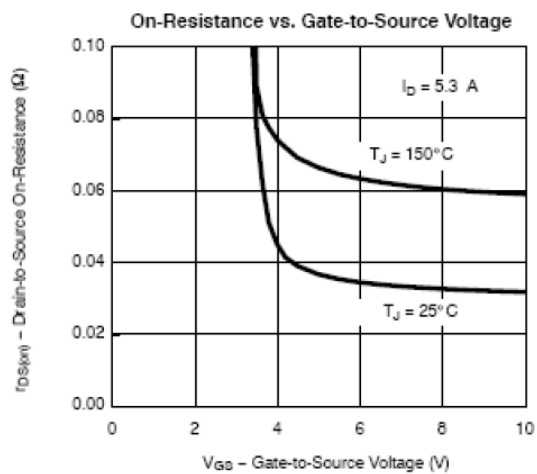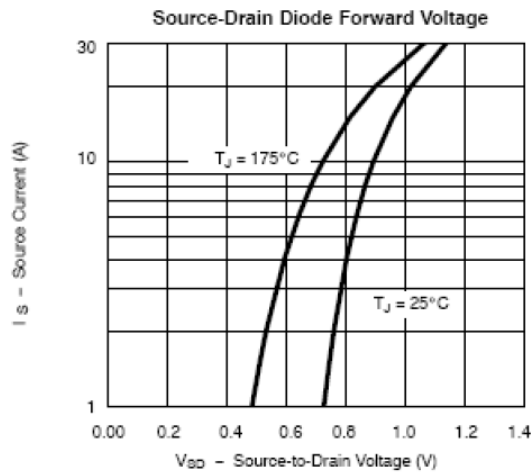

TYPICAL CHARACTERISTICS (25°C Unless Note)

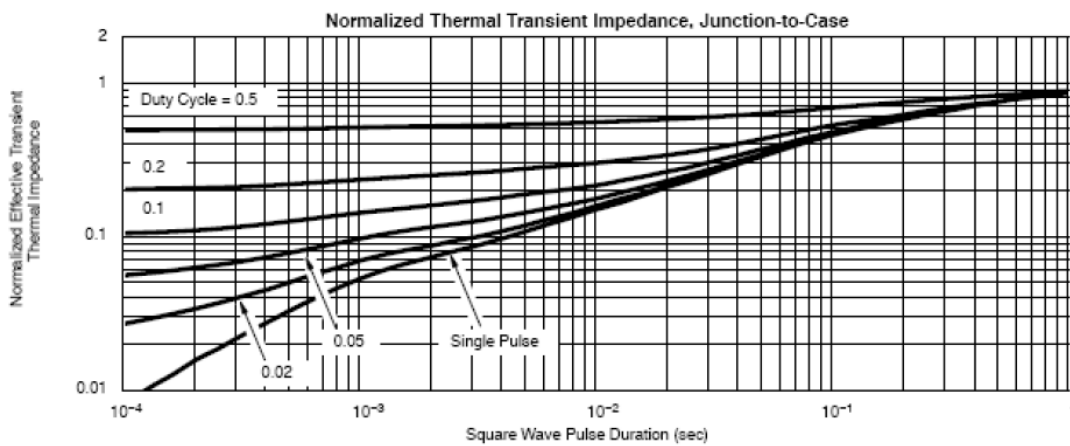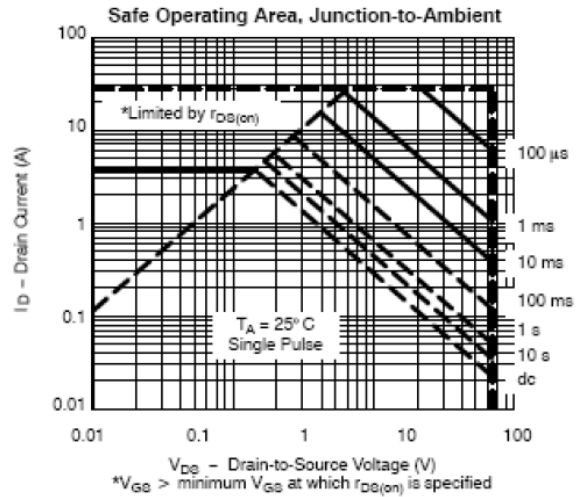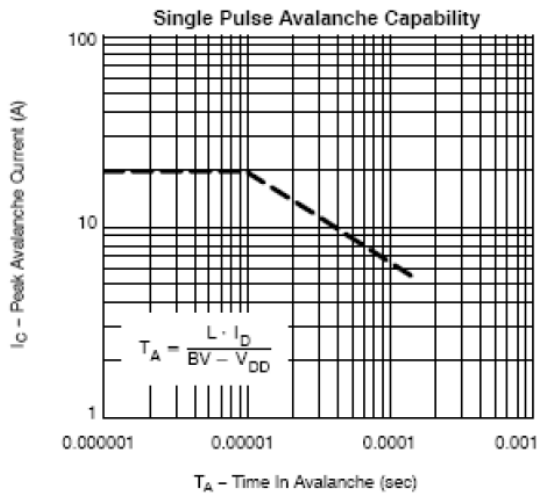

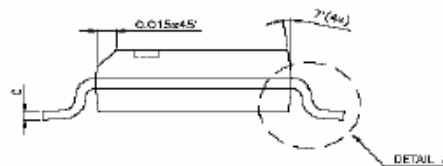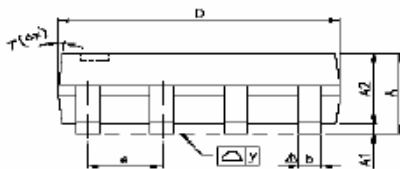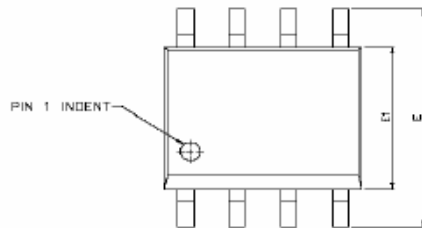SOP-8 PACKAGE OUTLINE


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.47	1.60	1.73	0.058	0.063	0.068
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.0098
D	4.80	4.85	4.95	0.189	0.191	0.195
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	—	1.27	—	—	0.050	—
L	0.38	0.71	1.27	0.015	0.028	0.050
Δ y	—	—	0.076	—	—	0.003
ϕ	0°	—	8°	0°	—	8°